

Armstrong Flooring™

Timberline® Plus

Commercial Flooring

Heterogeneous Vinyl Sheet



Armstrong Flooring™

TIMBERLINE® PLUS

TIMBERLINE® PLUS from Armstrong Flooring offers a range of low maintenance wood look Heterogeneous Vinyl Sheet Flooring, now **featuring Australian Species inspired colours and designs** (Spotted Gum, Blackbutt and Tasmanian Oak), with improved P3 Slip Resistance and a 0.7mm High Performance Wear Layer.

The combination of a warm, natural look and ease of maintenance make TIMBERLINE® PLUS ideal for retirement villages, aged and health care facilities, educational and retail environments.

- Protective Polyurethane Wear Layer reduces initial and ongoing maintenance
- High-performance Aluminium Oxide coating resists soil, stains, scratches, scuffs and abrasions
- Improved P3 & R10 Slip Resistance
- Classified as Commercial 34 Very Heavy and Industrial 43 Heavy (0.7mm wear layer)
- Global Green Tag™ Rate Level A
- 15 Year Commercial Warranty

Sustainable and Eco Friendly

At Armstrong Flooring, we focus our innovation on the development and delivery of inspired products which contribute to more sustainable spaces.



Highly Versatile for Design Flexibility

TIMBERLINE® PLUS sheets can be heat welded to provide great design options whilst maintaining a hygienic finish. TIMBERLINE® PLUS works seamlessly with other Armstrong Commercial Flooring products to create beautiful, coordinated spaces, allowing you to choose the right flooring for your space without compromising your design intent.



APPLICATIONS



Aged Care



Health Care



Education



Retail

PERFORMANCE



Slip Resistance

- P3 – Wet Pendulum
- R10 ° Oil wet inclining platform (ramp)



Use Areas

- High Density 0.7mm Wear Layer
- Classified as Commercial 34 Very Heavy and Industrial 43 Heavy



High Performance

- Aluminium Oxide coating resists soil, stains, scratches, scuffs and abrasions
- Group T Wear Resistance
- Standard 15 Year Commercial Warranty



Easy to Maintain

- Protective Polyurethane Wear Layer reduces initial and ongoing maintenance



Sustainability

- Best Practice PVC
- Phthalate free
- Ultra-low VOC
- Global Green Tag™ Rate Level A
- Heavy metal free



Timberline® Plus

2.0mm x 1.83m x 25m

P3* **R10*** SLIP RESISTANCE



BLACKBUTT PLUS
4X373701



SPOTTED GUM PLUS
4X373702



TASMANIAN OAK PLUS
4X373711



STONE GREY PLUS
4X373733



ASH GREY PLUS
4X373708



CACAO PLUS
4X373703

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.



Timberline® Plus

2.0mm x 1.83m x 25m

P3* R10* SLIP RESISTANCE




CALDE PLUS
4X031303



LUCI PLUS
4X031603



BLANC PLUS
4X032403

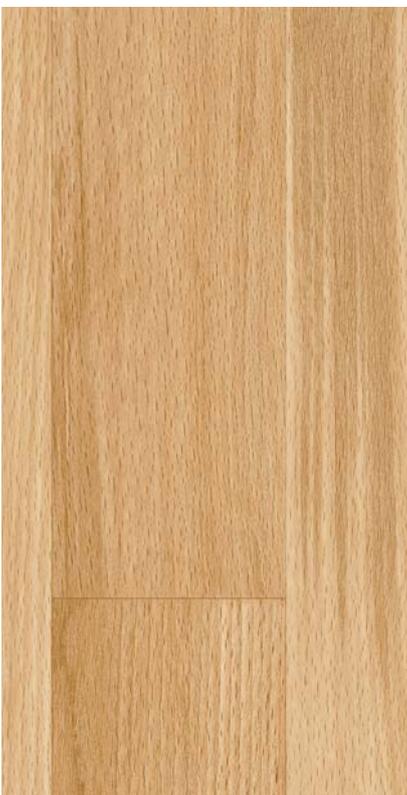

LIFE IS A PLUS
4X373473



HANG TEN PLUS
4X373483



COWABUNGA PLUS
4X373493

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.

Timberline® Plus

2.0mm x 1.83m x 25m

P3* R10* SLIP RESISTANCE



TOO RIGHT PLUS
4X041403



SOLID PLUS
4X373573



LIKE A ROCK PLUS
4X373593



BONAFIDE PLUS
4X373603



WELL VERSED PLUS
4X373743



OILED PLANK PLUS
4X373723

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.

Timberline® Plus

2.0mm x 1.83m x 25m

P3* R10* SLIP RESISTANCE



SOLU PLUS
4X061103



OBRA PLUS
4X062203

pvc MADE USING
BEST ENVIRONMENTAL
PRACTICE™





Upload your own photo



Use the Armstrong Flooring Design My Room tool to see and show the dramatic impact flooring can make on your project.

Scan the QR code to find out now!



TECHNICAL DATA		TIMBERLINE® PLUS		
Type of floor covering		Heterogeneous Sheet Vinyl		
Manufacturing standard	ISO 10582	Type 1 Binder content		
Use Area Classification	ISO 10874	Commercial: 34 Very Heavy	 Light Industrial 43 Heavy	
Surface treatment		PUR + Aluminum Oxide		
Wear resistance	EN 660-2	Group T		
Wear layer thickness	ISO 24340	0.7mm		
Total thickness	ISO 24346	2.0mm		
Roll length	ISO 24341	25m		
Roll width	ISO 24341	1.83m		
Weight/m ²	ISO 23997	2.78 kg/m ²		
m ² /Roll		45.75m ²		
Residual indentation	ISO 24343-1	≤ 0.1mm (PASS)		
Effect of castor chair	ISO 4918	PASS		
Colour fastness	ISO 105-B02 (method 3)	>6 (PASS)		
Impact sound isolation	ISO 140-8	4 dB		
Flexibility	ISO 24344 (method A)	20mm mandrel, no cracking (PASS)		
Chemical resistance		Good resistance (full tests can be supplied on request)		
Dimensional stability	ISO 23999	<0.40% (PASS)		
Curling after exposure to heat	ISO 23999	<8 mm (PASS)		
Seam strength	ISO 16906	PASS		
Fire Resistance – ISO 9239-1				
Critical radiant flux		≥4.5 kW/m ²		
Smoke development rate		< 750% min		
Pattern (Timberline Plus)	Life is a, Hang Ten, Cowabunga	Blackbutt, Spotted Gum, Tasmanian Oak, Stone Grey, Ash Grey, Cacao, Oiled Plank, Well versed	Solid, Like a Rock, Bonafide, Too Right	Solu, Obra, Luci, Calde, Blanc
Plank size (within pattern) – nominal	Random lengths between 795-329mm x 65mm	1269mm x 180mm	Oak 1264mm x 90mm	Obra 1250 x 90, Luci 625 x 100, Solu, Calde, Blanc 625 x 112.5mm
Pattern repeat (mm)	900 x 1250 (1/2 Dropped)	900 x 1250 (1/3 Dropped)	900 x 1250 (1/2 Dropped)	900 x 1250
Slip Resistance AS 4586:2013				
Surface Embossing	EC-5	EC-5	EC-5	EC-5
Appendix A: Wet Pendulum (Slider 96)	P3	P3	P3	P3
Appendix D: Oil-wet inclining platform	R10	R10	R10	R10
Installation	Full Spread adhesive. Install to AS1884			
Seaming	Heat welded with matching weld rod, chemical seam seal (follow manufacturer's instructions)			
Recommended adhesive	Armstrong Flooring; Full spread SV-200, Coving & Accessories: SC-100 Contact Adhesive			
Applications	Interior commercial areas with high traffic and light industrial areas, e.g. Medical centres, nursing homes, offices, store rooms, production halls, department stores, schools, hospitals. Also suitable for residential applications.			
Manufactured	South Korea			
Instructions	Armstrong Flooring Pty Ltd instructions regarding adhesives, installation, cleaning and maintenance should be observed. Please contact Armstrong Flooring for details.			

NOTE: Printed images may vary from actual samples, variation in colour may occur between batches, Dimensions are nominal.

*For details refer to individual third party certificates.





Armstrong Flooring™

Armstrong Flooring™
29 – 39 Mills Road Braeside 3195
Victoria Australia
1800 632 624
www.armstrongflooring.au



May 2023